
## TRACTION BATTERY

# 3PzS375 (2V375Ah)





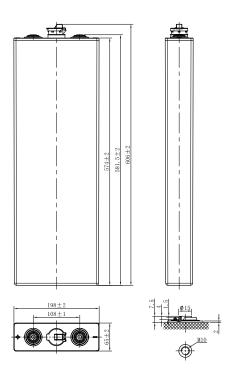

### **CHARACTERISTICS**

Item		Specifications
Rated Voltage		2V
Capacity@25°C (86°F)	C <sub>5</sub> , 1.70V/cell	375Ah
Dimension	Length	65mm (2.56inches)
	Width	198mm (7.80inches)
	Container Height	574mm (22.6inches)
	Total Height	606mm (23.9inches)
Approx Weight	Without Electrolyte	15.2kg (33.5lbs)
	With Electrolyte	20.5kg (45.2lbs)
Terminal		M10
Container Material		PP
Max. Discharge Current (5s	s)	8C₅
Operating Temp. Range	Discharge	-15~55°C(5~131°F)
	Charge	0~50°C(32~122°F)
	Storage	5~40°C(41~104°F)
Cycle life		≥1200 cycles
Cycle Use	Initial Charging Currer	nt less than 0.14C₅
	Voltage	2.60V-2.65V at 25°C(77°F)
	Temp. Coeffcient	-5mV/°C
Capacity affected by Temperature	40°C(104°F)	103%
	30°C(86°F)	100%
	0°C(32°F)	86%
Self Discharge	Less than 8% C₅ after storing 28 days at 20°C,	
	and then a freshening charge is required.	
	For higher temperature, the time interval will be shorter.	

### **APPLICATIONS**

- Forklift
- Traction vehicle
- Transportation vehicle
- Tram
- Bus
- · Gymnastic and recreation location


### **GENERAL FEATURES**


- · Nonwoven protective gauntlet, better elastic property, less pore size, less electrical resistance and higher air permeability
- · Flexible, fully isolated connector prevents any creeping current
- Flip top plugs with special electrolyte level indication
- Automatic refilling plugs are also available (according request)
- Imported microporous catercorne rseparator with advanced quality provides higher porosity and lower electrical resistance
- Containers and lids are made of polypropylene (PP)The impact resistance is very good
- · Patented terminal sealing construction fully prevents plate growth and electrolyte leakage


## TRACTION BATTERY


3PzS375 (2V375Ah)




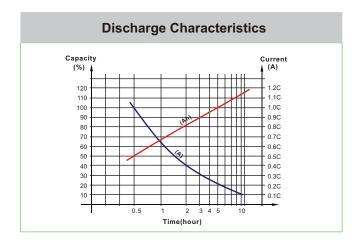


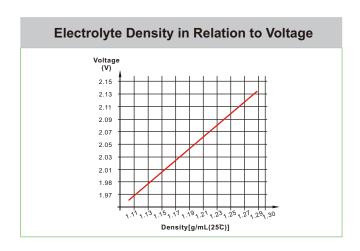

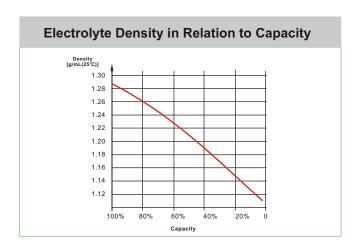

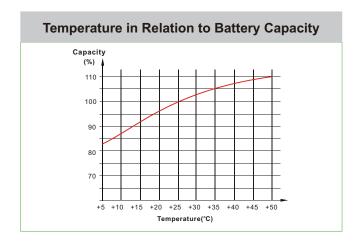

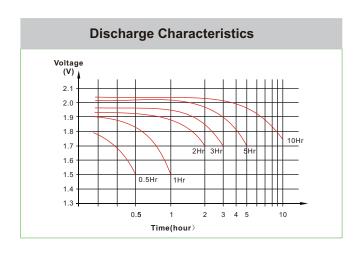

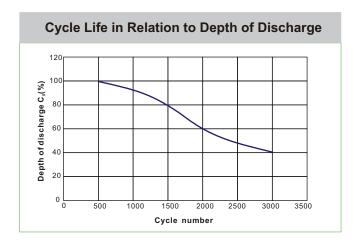

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

**Leoch Battery Corporation** 

www.leoch.us

Leoch Europe S.A.

mww.leoch.eu