


LPGS SERIES-HYBRID GEL BATTERY

LPGS12-200 (12V200Ah)

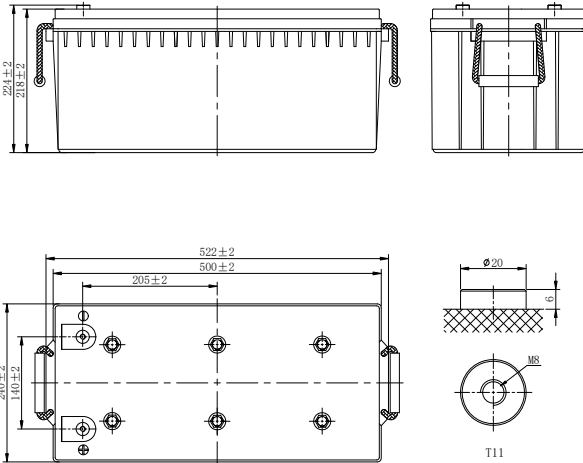

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25°C)	C ₂₀ : 1.75V/cell	200Ah
Dimension	Length	522mm (20.6inches)
	Width	240mm (9.45inches)
	Container Height	218mm (8.58inches)
	Total Height	224mm (8.82inches)
Approx Weight	60.9kg (134.3lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	3640A	
Internal Resistance (25°C)	Approx 3.2 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	≤3% per month at 25°C (77°F). LPGS series batteries can be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Self Discharge		

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)												
F.V/Time	1h	2h	3h	4h	5h	6h	8h	10h	20h	48h	72h	100h
1.90V/cell	88.5	55.8	42.6	34.9	29.4	25.3	19.7	16.2	8.68	3.87	2.63	1.90
1.85V/cell	105.8	62.5	46.8	38.0	32.0	27.6	21.5	17.7	9.52	4.18	2.85	2.08
1.80V/cell	114.4	65.9	49.0	39.4	33.1	28.4	22.2	18.2	9.76	4.31	2.95	2.15
1.75V/cell	120.2	68.8	50.6	40.6	33.8	29.0	22.6	18.6	10.0	4.38	2.99	2.19

Constant Power Discharge (Watts/cell) at 25°C (77°F)												
F.V/Time	1h	2h	3h	4h	5h	6h	8h	10h	20h	48h	72h	100h
1.90V/cell	173.3	110.0	84.7	69.5	59.0	50.8	39.5	32.4	17.3	7.74	5.25	3.80
1.85V/cell	205.1	122.1	92.1	75.1	63.7	54.8	42.8	35.3	19.0	8.37	5.71	4.18
1.80V/cell	219.6	127.7	96.0	75.5	65.5	56.3	44.1	36.2	19.5	8.60	5.89	4.30
1.75V/cell	230.0	132.8	98.8	79.5	66.6	57.3	44.7	36.8	19.9	8.76	5.98	4.38

LPGS SERIES-HYBRID GEL BATTERY

LPGS12-200 (12V200Ah)



APPLICATIONS

- Solar energy (wind energy) household system/ communication/ communication base station
- Movable energy storage system
- Solar traffic lights
- Solar, wind and solar power generation
- Emergency lighting system


GENERAL FEATURES

- Proven AGM-GEL technology
- Excellent deep discharge recovery and cyclability
- Very low maintenance: no water addition
- Low self-discharge rate


STANDARDS

- IEC60896 Certified
- Classified as "Long Life" according to Eurobat
- UL, CE Approved
- Manufactured in Leoch@IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

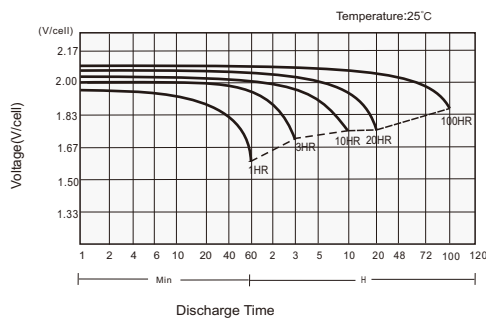

Charging Characteristics

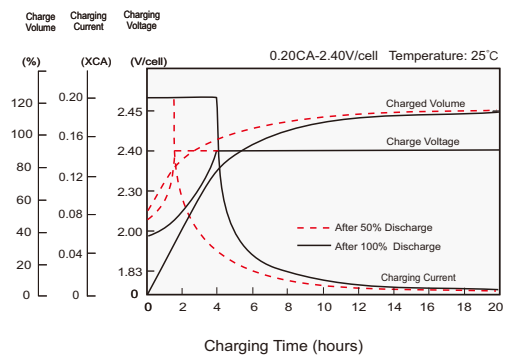

Cycle Life in Relation to DoD

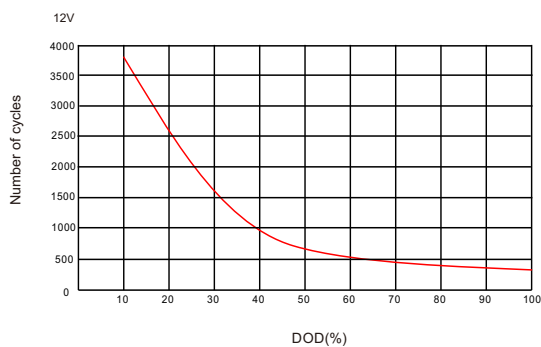

Self Discharge Characteristics

