

FLOODED HIGH TEMPERATURE BATTERY

57511HT (12V75Ah)



CHARACTERISTICS




Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	75Ah
Reserve Capacity	128min
Cold Cranking Amps@0°F (-18°C)	540A
Length	314mm(12.4inches)
Dimension	Width 174mm(6.85inches)
	Height 190mm(7.48inches)
Approx Weight	19.2kg(42.3lbs)
Terminal	1
Cell layout	1
Hold-Down	B13
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS6

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

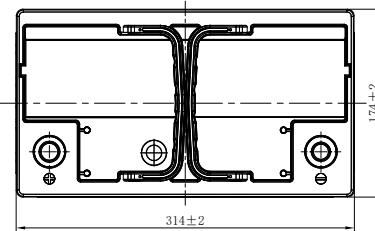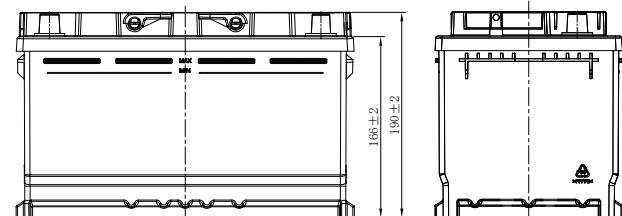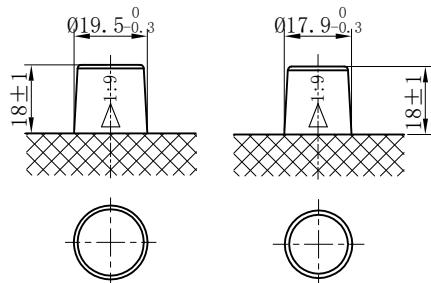

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu