

Lithium Iron Phosphate (LiFePO4) Battery I Feli-2410M (25 6V10Ah)

Features Of LiFePO4 Battery

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.


Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20°C~60°C.

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

Physical Dimension-mm





Typical Applications

- Electric vehicles, electric mobility
- Solar/wind energy storage system
- Telecommunication
- Medical equipment
- Lighting

Specification


Electrical Characteristics	Nominal Voltage	25.6V
	Nominal Capacity	10Ah
	Energy	256Wh
	Internal Resistance(AC)	≤20mΩ
	Cycle Life	>3000 cycles @0.5C 80%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	29. 2±0.2V
	Charge Mode	0.2C to 29.2V, then 29.2V,charge current to 0.02C (CC/CV)
	Charge Current	5A
	Max. Charge Current	10A
	Charge Cut-off Voltage	29.2V±0.2V
Standard Discharge	Rated Discharge Current	5A
	Max. Discharge Current	10A
	Discharge Cut-off Voltage	20V
Environmental	Charge Temperature	0 $^{\circ}$ C to 55 $^{\circ}$ C (32F to 131F) $@60\pm25\%$ Relative Humidity
	Discharge Temperature	−20 $^{\circ}$ C to 60 $^{\circ}$ C (−4F to 140F) $@60\pm25\%$ Relative Humidity
	Storage Temperature	0° to 45 $^{\circ}$ (32F to 113F) $@60\pm25\%$ Relative Humidity
	IP Class	IP65
Mechanical	Plastic Case	ABS
	Approx. Dimensions	181.5mm*77mm*167.5mm (7.15in.*3.03in.*6.59in.)
	Approx. Weight	2.76kg (6.08lbs)
	Terminal	Т3




Different Rate Discharge Curve(25℃)

28.0 26.4 24.8 21.6 20.0 18.4 0 20min 40min 60min 2h 5h 10h Discharge Time


Different Temperature Discharge Curve(0.5C)

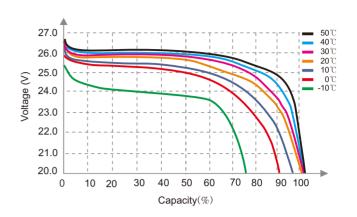


State of Charge Curve(0.5C, 25℃)

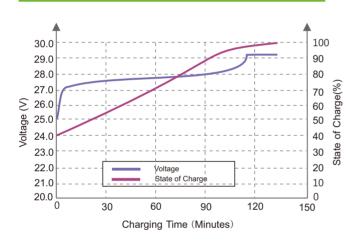


Charging Characteristics(0.5C, 25℃)

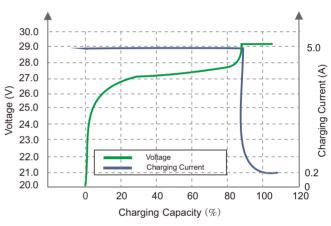

Different DOD Discharge Cycle Life Curve(0.5C)

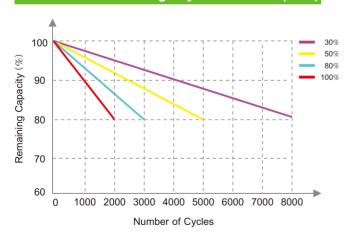

Different Temperature Self Discharge Curve

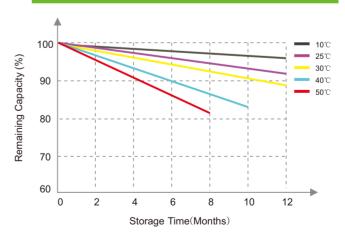

Publication No :LB-LFeLi-2410M-PD-EN-V2.0-202208





