
MAINTENANCE-FREE MOTORCYCLE BATTERY

EB7B-4-1(J) (12V6.5Ah)








GENERAL FEATURES

- · Maintenance-free
- · Sealed and non-spillable AGM battery
- · Shipped pre-charged and ready to install

CHARACTERISTICS

Item		Specifications
Nominal Voltage		12V
Nominal Capacity (10HR)		6.5Ah
Cold Cranking Perfo	rmance Amps@0°F (-18	3°C) 70A
Dimension (±2mm)	Length	150mm (5.91inches)
	Width	66mm (2.60inches)
	Container Height	93mm (3.66inches)
	Total Height	93mm (3.66inches)
Battery (with acid)	Approx Weight	2.15kg (4.74lbs)
Terminal type		A
Battery type	Factory Activated Ser	ries
Full Charge	Constant-Voltage Charge:	
	Initial charging currer	nt Less than 0.3C ₁₀
	Voltage	14.40V~15.00V at 25°C (77°F)
	Charging time	15~18h
	Constant-Current Ch	arge:
	Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h	
Floating Charge	Initial charging currer	nt Unlimited
	Voltage	13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%

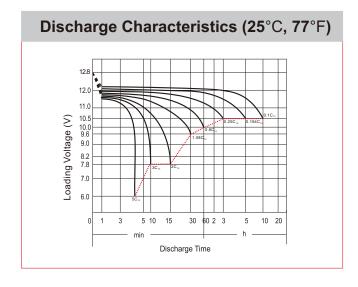

Leoch International Technology Ltd.

m www.leoch.com

Leoch Batteries Pte Ltd

@ www.leoch.sg

Leoch Battery Corporation

mww.leochamericas.com

Leoch Europe S.A.



^{*}Values are subject to variation of +/- 5% in normal manufacturing processes.